




		Hood Type	Ventilation Capacity	Number of Power Levels	Width
		Undermount	650 m³h	З	70 cm
Main Features		Dimensions & Wei	ghts		
Туре	Undermount	Cut-out Dimensions (WxD):		665 x 265 mm	
Control:	Push Button	Unpackaged Height:		254 mm	
Construction Type:	Stainless Steel	Unpackaged Width:		695 mm	
Operation Levels:	3	Unpacked Depth:		296 mm	
Lighting:	2 x 2 Watt LED Lamps	Unpackaged Weight:		6.6 kg	
Filtration:	1 x Washable Aluminium	Packaged Height:		325 mm	
	Cassette Filter	Packaged Width:		745 mm	
Filter:	1 x CF152 Included,	Packaged Depth:		340 mm	
	Replacement Sold Separately	Packaged Weight:		9.3 kg	
Air Extraction (according to					

Air Extraction (according to	
EN61591):	650 m ³
Dimension of Pipe Connection:	150 mr
Adapter:	120 mr
Noise Level:	70 db(/
Voltage:	220-24
Frequency:	50 Hz
Supply Cord & Plug:	Yes
Total Power Consumption:	194 W

650 m³/h 150 mm 120 mm 70 db(A) 220-240



8860143200 8690842121739 2 Years + 3 Years by Registration September 2017

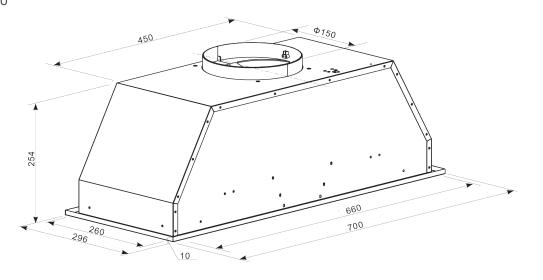



©Beko 2021

beko.com.au / beko.co.nz

*Specifications are correct at time of printing. Specifications may change without prior notice.